

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061818 A1

(51) International Patent Classification⁷: **E04G 21/32**,
A62B 1/04, 35/04

(NL). VAN DER MARK, Hendrik Johannes [NL/NL];
Kerkedijk 51, NL-1862 BE Bergen (NL).

(21) International Application Number:
PCT/NL2004/000894

(74) Agent: **JILDERDA, Anne Ayolt**; Octrooibureau Lioc
B.V., Maliebaan 46, P.O. Box 13363, NL-3507 LJ Utrecht
(NL).

(22) International Filing Date:
21 December 2004 (21.12.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1025127 24 December 2003 (24.12.2003) NL
1025821 26 March 2004 (26.03.2004) NL

(71) Applicant (*for all designated States except US*): **KEDGE
HOLDING B.V.** [NL/NL]; Stephensonweg 2, NL-4207
HB Gorinchem (NL).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **MASTENBROEK,
Martin** [NL/NL]; Meentweg 49, NL-1406 KD Bussum

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SAFETY DEVICE FOR A FALL RESTRAINT

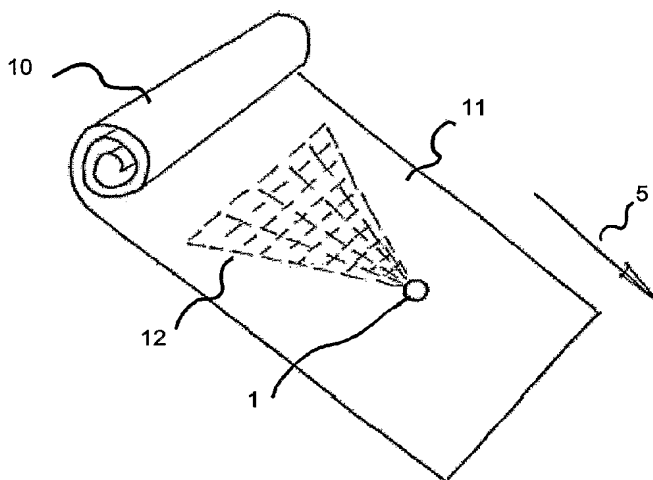

(57) Abstract: A safety device for a fall restraint comprises an anchoring member (1) to which the fall restraint can be coupled directly or indirectly, and fastening means for a firm and durable connection to an object (13). The fastening means are formed by a flexible fastening flap (11) which is intended and adapted to bring about said firm and durable connection to the object. Extending from the fastening flap (11) is a fastening net (12) via which the anchoring member (1) is connected to the flexible fastening flap (11).

WO 2005/061818 A1

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.